



ENERGY MOULDED

RECESSED DOWNLIGHT RANGE



- IP20/44
- Injection Moulded Body
- Highly Polished Faceted Reflector
- Selection of Attachments
- High Frequency Control Gear
- Cable Gland Entry
- Longlife 50,000 hrs Fluorescent options
- LED Option

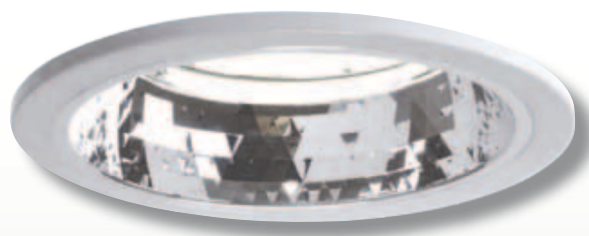

DESCRIPTION

High quality compact fluorescent recessed downlight range offering a variety of bezel attachments, white, chrome, gold or steel etc

APPLICATION

Commercial Applications, Prestige Offices, Foyers, Showrooms, Corridors, Retail Stores etc

RANGE AVAILABLE

Catalogue No.	Description	Weight (Kg)	Dimensions
NRGM118	1x18w HF TC-DEL	1.5 Kg	
NRGM218	2x18w HF TC-DEL	1.5 Kg	
NRGM126	1x26w HF TC-DEL	1.5 Kg	
NRGM226	2x26w HF TC-DEL	1.5 Kg	
NRGM132	1x32w HF TC-TEL	1.5 Kg	
NRGM142	1x42w HF TC-TEL	1.5 Kg	

LED Versions (Please refer to website for current technical specification)

Wattage	No LED's	mA	Lms	Weight (Kg)
NRGM16wLED	60	500	1500	1.5 Kg
NRGM23wLED	60	700	2100	1.5 Kg
NRGM26wLED	72	700	2500	1.5 Kg
NRGM24wLED/HO	24	700	2900	1.5 Kg
NRGM48wLED/HO	24	1400	4800	1.5 Kg

various Optics available on request


Available in colour temp 3000/4000/5000K
Note EM3 version c/w 4 x 1 Watt LED

Suffix (see attachments opposite page)

/EM3 3 hour Remote Maintained Emergency
/LIFE Long Life Fluorescent option



Cut out Ø 215mm

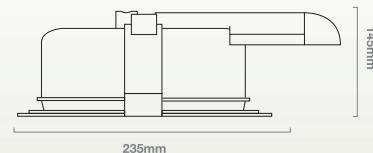

ENERGY MOULDED ACCESSORIES

NRGM ACCESSORIES



Halo Clear Attachment

MCC	Clear	0.06 Kg
MCCR	Clear Red	0.09 Kg
MCCG	Clear Green	0.09 Kg
MCCB	Clear Blue	0.09 Kg



Halo Opal Attachment

MCO	Opal	0.06 Kg
MCOR	Opal Red	0.09 Kg
MCOG	Opal Green	0.09 Kg
MCOB	Opal Blue	0.09 Kg



Bezel Attachment

MCB	Chrome Large	0.1 Kg
MGB	Gold Large	0.1 Kg
MSB	Steel Large	0.1 Kg



Cat 2 Attachment

MC2	Medium Turbo Louvre	0.2 Kg
-----	---------------------	--------



Floating Ring Attachment

MFR1	Medium Floating Ring	0.5Kg
------	----------------------	-------



IP44 Clear Attachment

M441	Clear Glass	0.2 Kg
------	-------------	--------



IP44 Frosted Attachment

M442	Frosted Glass	0.2 Kg
------	---------------	--------



IP44 Inner Frosted Attachment

M443	Inner Frosted Glass	0.2Kg
------	---------------------	-------



IP 44 Grid Attachment

M444	Grid Pattern Glass	0.2 Kg
------	--------------------	--------