





LIBERTY PLUS LUX

RECESSED MODULAR



- IP20
- Unique Clear Reeded Polycarbonate Side Spill Diffuser
- Central Specular Wedge Blade Louvre
- Powder Coated Paint Finish
- Suitable for 15/25mm Exposed T Grid Ceilings
- High Frequency T5 Control Gear
- 3 & 4 Lamp options
- Secure Version (Optional)
- Microwave Motion Detection option
- Longlife 50,000 hrs Fluorescent options
- LED Option

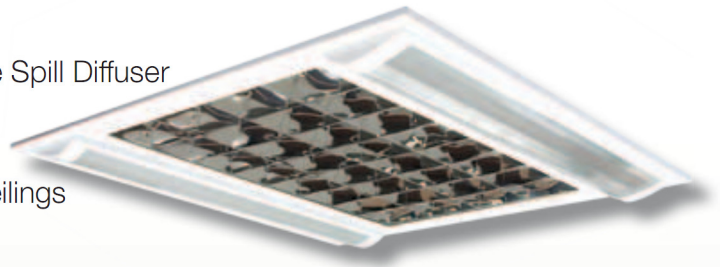

DESCRIPTION

Unique luminaire with extruded polycarbonate side refractor lenses providing excellent side spill onto ceiling & downward light in conjunction with the specular wedge aluminium louvre. A 'Secure' version for sensitive areas is available on request. LED option on request & long life fluorescent options.

APPLICATION

Commercial Office Lighting, Meeting Rooms, Computer Rooms, Retail Areas, Reception & Medical Areas.

RANGE AVAILABLE

| Catalogue No. | Description | Weight (Kg) | Dimensions |
|---------------|-------------|-------------|------------|
| LIBPL7314 | 3x14w HF T5 | 4.3 Kg | |
| LIBPL7414 | 4x14w HF T5 | 4.3 Kg | |
| LIBPL7324 | 3x24w HF T5 | 4.3 Kg | |
| LIBPL7424 | 4x24w HF T5 | 4.3 Kg | |

LED Versions (Please refer to website for current technical specification)

| Wattage p/mtr | No LED's | Voltage | Lms | Weight (Kg) |
|------------------------------------------------------------------|----------|----------|--------------------|-------------|
| (Compromising of 10 qty x 100mm sections of 2.3w) LIBPL23wLED | 60 | 24v/240v | 2100 } per lampway | 4.3 Kg |

Various T5/T8 type LED Tubes on request
Available in colour temp 3000/4000/5000k

Suffix

| | |
|---------|-----------------------------------|
| /HFD | High Frequency Dimmable Gear |
| /EM3 | 3 hour Maintained Emergency |
| /M-Wave | Microwave Motion Detection option |
| /LIFE | Long Life Fluorescent option |

*Secure version available on request

