




METEOR

FLOODLIGHTING



- IP65
- Cast Aluminium Body
- Toughened Glass
- Integral Control Gear, Easy Access
- Optional Integral Photo – Cell
- Symmetrical Distribution
- Wire Guard (optional)
- Stirrup Mounting Bracket
- Economy Budget Floodlight
- Black Metal Work



DESCRIPTION

Die cast aluminium body with stirrup mounting bracket. Toughened front glass with toggle clips. Anodised aluminium reflector giving excellent photometric performance.

APPLICATION

General Area Floodlighting, Car Parks, Perimeter Lighting etc

RANGE AVAILABLE

Catalogue No.

MET250S
MET400S

MET250MH
MET400MH

Suffix

/PC
/WG

Description

250w SON-T
400w SON-T

250w HIT
400w HIT


Integral Photo – Cell
Wire Guard

Weight (Kg)

8 Kg
8 Kg

8 Kg
8 Kg

Dimensions

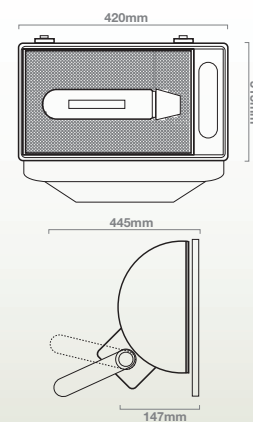

*Various surface and pole mounting option complement the Meteor range.

*Refer to page 48 for mounting accessories