





# URBAN RANGE

## EXTERIOR LIGHTING RANGE



- IK10
- Polycarbonate Body & Lens version
- Die Cast Aluminium & Flat Glass version
- High Grade Polished Aluminium Reflector
- Separate Gear Compartment
- Gear Compartment IP43
- Lamp Compartment IP65
- To Fit 60mm vertical or side entry
- Attractive Modern Design
- Maximum Projected Area 0.094m<sup>2</sup>
- LED version on request

Moulded version

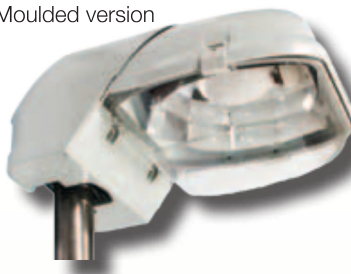

Die-cast version



### DESCRIPTION

A range of modern road lanterns with separate gear housing and reflector compartments. Both the polycarbonate & die cast version diffuser/glass are held onto the body/reflector by stainless steel captive closing toggles and sealed to IP65 with a built-in gasket.

### APPLICATION

General Street Lighting, Car Parks, Driveways etc

### RANGE AVAILABLE

Catalogue No.	Description	Weight (Kg)	Dimensions
URB70S	70w SON	3.0 Kg	
URB100S	100w SON	3.0 Kg	
URB50MH	50w Metal Halide, HIPE	3.0 Kg	
URB100MH	100w Metal Halide, HIPE	3.0 Kg	

**LED Versions** (Please refer to website for current technical specification)

Wattage	No LED's	mA	Lms	Weight (Kg)
URB24wLED	24	700	2500	3.0/5.0 Kg
URB48wLED	24	1400	4800	3.0/5.0 Kg

Available in colour temp 3000/4000/5000K

### Suffix

/Alum	Die Cast Aluminium Body
/Poly	Polycarbonate Body version (flat glass)
/PC	Integral dusk to dawn photocell

\*Refer to page 48 for spigot adapters

