




# GLADIATOR


Standard

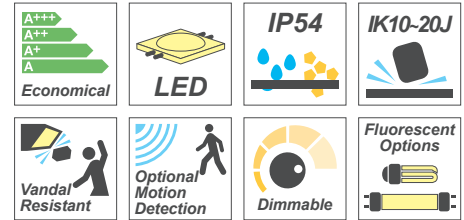

- Standard or Slim Body
- Fully Welded Steel Construction
- Frosted or Clear Reeded Polycarbonate Dish Diffuser
- Removable LED Gear Tray
- Stainless Steel Security Screws



Slim

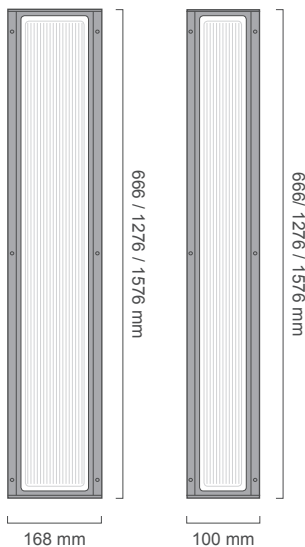

**Standard Fixing Detail**

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

**Linear LED Technical Information**

Please refer to website for current LED technical specification

Order Code	Length		Lumens		lm/W	Colour Temp	Ra	Weight
	HE	HO	HE	HO	<small>lumen/Circuit Wattage</small>	Kelvin (K)	CRI	Kg
GLR 1.3	2.6	666	1300lm	2600lm	115	3000K/4000K	>80	6.0
GLR 2.6	5.2	1276	2600lm	5200lm	110	3000K/4000K	>80	10.0
GLR 3.2	6.5	1576	3250lm	6500lm	108	3000K/4000K	>80	12.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

**Ordering Options**

Description	Suffix Ordering Code
Slim Body Version	/SLIM
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/T5 or /T8 On Request