





# LIBERTY 4 LOUVRE

## RECESSED MODULAR



- IP20
- Lighting Control CAT2 Wedge Blade Louvre
- Fabricated Steel Body
- Powder Coated Finish
- Suitable for 15/25mm Exposed 'T' Ceilings
- High Frequency Gear
- Microwave Motion Detection option
- Longlife 50,000 hrs Fluorescent options
- LED Option

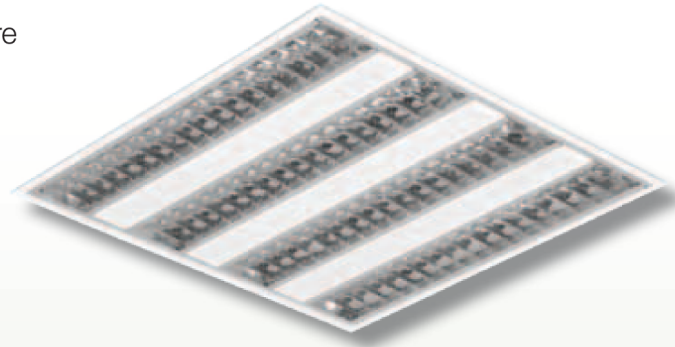

### **DESCRIPTION**

A range of recessed modular fluorescent luminaires is suitable for applications where aesthetic appearance and light control are important. 4 x CAT2 louvre perforated infill panels. LED option on request & long life fluorescent options.

### **APPLICATION**

Commercial Office Lighting, Meeting Rooms, Computer Rooms, Retail Areas, Reception Areas, Conference Room etc

### **RANGE AVAILABLE**

Catalogue No.	Description	Weight (Kg)	Dimensions
LIB4414	4 x 14w T5	3.5 Kg	
LIB4424	4 x 24w T5	3.5 Kg	

**LED Versions** (Please refer to website for current technical specification)

Wattage p/mtr	No LED's	Voltage	Lms	Weight (Kg)
(Compromising of 10 qty x 100mm sections of 2.3w)				
LIB23wLED	60	24v/240v	2100 } per lampway	3.5 Kg

LED flat panel on request  
 Various T5/T8 type LED Tubes on request  
 Available in colour temp 3000/4000/5000k

### **Suffix**

/HFD	High Frequency Dimmable Gear
/EM3	3 Hour Maintained Emergency
/M-Wave	Microwave Motion Detection option
/LIFE	Long Life Fluorescent option

