





PLATOON ANGLE

VANDAL RESISTANT AMENITY LIGHTING



- IP65 – IK10 ++
- Fully Welded Fabricated Steel Body
- Optional VANDACOAT offering enhanced Corrosion/Vandal & Graffiti Resistant Coating System
- Opal or Clear Prismatic Polycarbonate Diffuser
- Stainless Steel Torx Security Screws
- Various RAL colour options
- Removable High Frequency Gear Tray
- Microwave Motion Detection option
- LED Option

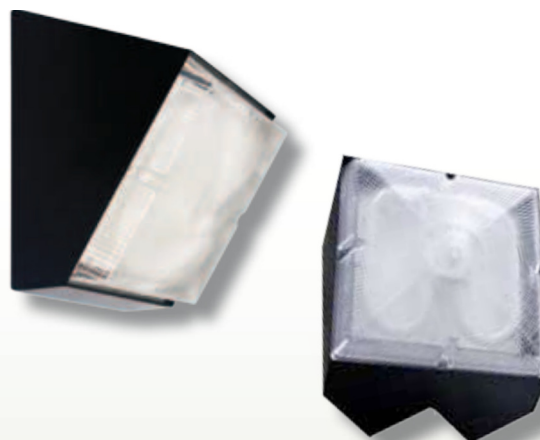

Angle corner

DESCRIPTION

Square robust vandal resistant luminaire with 4No Torx Stainless Steel Screw diffuser fastening. Removable high frequency electronic control gear tray for low energy fluorescent lamps. Corner mounted version available.

APPLICATION

External or Internal with a multitude of applications for tough resilient luminaire, Public Areas, Toilets, Law Courts, Police Stations etc. Wall or Ceiling Mounted.

RANGE AVAILABLE

Catalogue No.	Description	Weight (Kg)	Dimensions
PLAA162D	1x16w 2D HF TC-DD	4.0 Kg	
PLAA282D	1x28w 2D HF TC-DD	4.0 Kg	
PLAA382D	1x38w 2D HF TC-DD	4.0 Kg	
PLAA218	2 x18 HF TC-DEL	4.0 Kg	
PLAA226	2 x26 HF TC-DEL	4.0 Kg	

LED Versions (Please refer to website for current technical specification)

Wattage	No LED's	mA	Lms	Weight (Kg)
PLAA16wLED	60	500	1500	4.0 Kg
PLAA23wLED	60	700	2100	4.0 Kg
PLAA26wLED	72	700	2500	4.0 Kg
PLAA48wLED	24	1400	4800	5.0 Kg

note EM3 version c/w 4 x 1w LED
Available in colour temp 3000/4000/5000K

Suffix

/P	Prismatic Controller
/O	Opal Diffuser
/B	Black Paint Finish
/W	White Paint Finish
/EM3	Integral Maintained Emergency
/PC	Integral Photocell
/SS	Fitted with security screws
/SD	Security Screwdriver
/CR	Corner Mount Version
/M-Wave	Microwave Motion Detection option
/LIFE	Long Life Fluorescent option
/VCOAT	VANDACOAT Enhanced External Coating system

*Eyelid option on request
*Alternative RAL colours on request

