




RENOUND SQUARE


(SAFER CELL) ANTI LIGATURE BULKHEAD RANGE



*NOMS STD/E/SPEC/022/Cellular & Safer Cell Accommodation

Anti Ligature Note: When correctly installed against ceiling, using 'Anti Pick' Mastic.

- IP65 – IK10 ++
- Fully Welded Heavy Robust Fabricated Steel Body
- Captive Diffuser Panel, which removes without the need to disturb 'anti pick' mastic
- Wall or Ceiling Mount
- Stainless Steel Torx Security Screws
- Removable High Frequency Gear Tray
- Microwave Motion Detection option
- Longlife 50,000 hrs Fluorescent options
- LED Option

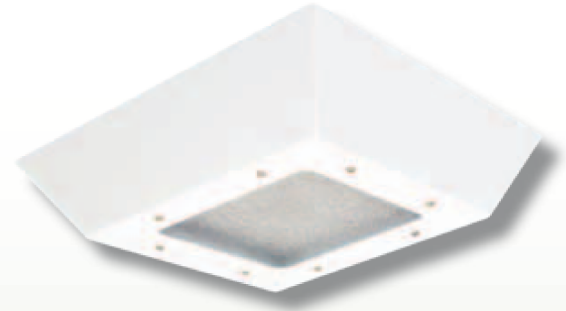

DESCRIPTION

Square robust vandal resistant, anti ligature luminaire for Safer Cell accommodation. Removable high frequency electronic control gear – tray for low energy fluorescent lamps. Can be mounted on wall or ceiling. Bezel/Diffuser removes without disturbing anti pick mastic. LED versions available on request & long life fluorescent options.

APPLICATION

For use in sensitive areas with multitude of applications for tough resilient luminaire, Prisons, Police Stations, Law Courts, Toilets etc. Wall or Ceiling Mounted.

RANGE AVAILABLE

Catalogue No.	Description	Weight (Kg)	Dimensions
RNDS282D	1x28w HF TC-DD	11 Kg	
RNDS382D	1x38w HF TC-DD	11 Kg	
RNDS226	2x26w HF TC-DEL	11 Kg	
RNDS232	2x32w HF TC-TEL	11 Kg	
RNDS336	2x36w HF TC-F	11 Kg	
RNDS242	2x42w HF TC-TEL	11 Kg	

LED Versions (Please refer to website for current technical specification)

Wattage	No LED's	mA	Lms	Weight (Kg)
RNDS16wLED	60	500	1500	11 Kg
RNDS23wLED	60	700	2100	11 Kg
RNDS26wLED	72	700	2500	11 Kg

note EM3 version c/w 4 x 1w LED
Available in colour temp 3000/4000/5000K

Suffix

/P	Prismatic Controller
/O	Opal Diffuse
/GRP	Glass Reinforced Plastic Diffuser
/HFD	High Frequency Dimmable
/EM3	Integral Maintained Emergency
/NL	Night Light
/SD	Security Driver
/M-Wave	Microwave Motion Detection option
/LIFE	Long Life Fluorescent option

