


VERMONT



VANDAL RESISTANT BOLLARD RANGE



- IP65 – IK10 ++
- Cast Aluminium Head
- Clear Polycarbonate Lens
- Anodised Aluminium Louvre
- Steel Tube
- Root or Flange Mount
- Discharge or Compact PL Lamp options
- Black Paint Finish as standard
- LED Option

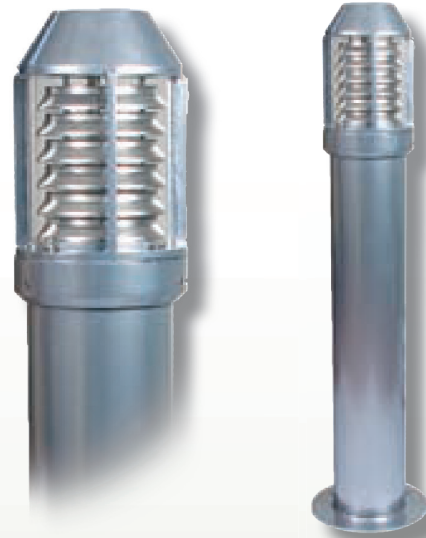

DESCRIPTION

A robust decorative bollard with clear polycarbonate lens & aluminium louver stack with heavy cast alloy with protective struts. Available either root or flange mount.

APPLICATION

Commercial & Industrial locations, Retail Parks, Residential Developments, Pathways ideally suited to public circulation areas & exposed amenity lighting applications.

RANGE AVAILABLE

Catalogue No.	Description	Weight (Kg)
VMT50S	50w SON	13.0 Kg
VMT70S	70w SON	13.0 Kg
VMT50MH	50w Metal Halide, HIPE	13.0 Kg
VMT70MH	70w Metal Halide, HIPE	13.0 Kg
VMT26	26w HF/TC-DEL	12.5 Kg
VMT32	32w HF/TC-DEL	12.5 Kg
VMT42	42w HF/TC-DEL	12.5 Kg
Suffix		
/RT	Root Mounting Version	
/FL	Flange Mounting Plate Version	
/EM3	Integral Emergency – PL lamps only	
/180°	180° Light Barfile	

*Other RAL colour options available on request
 *LED option available on request

Dimensions

